



INTEG

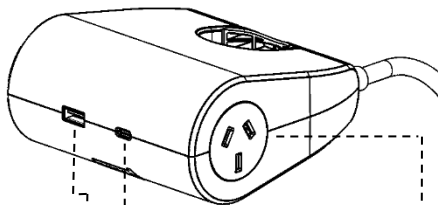

USB-A port
USB-C port

AC outlet

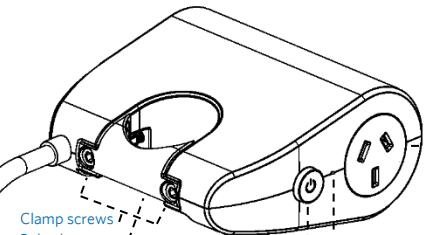

Clamp screws
Pole clamp

Power button
Power indicator

Product Introduction

The Integ ChargeUp is a multipurpose charging unit and power extension that brings the sockets within arms reach. The unit can either be placed on a desk where it will sit firmly with its stiff rubber feet or it can be placed on a pole with the built in clamp to free up some precious desk space. Two AC sockets provide mains power while a USB-A port provides fast charge for mobile devices and a USB-C port provides even faster charging for your newer devices.

Product Specification

Integ ChargeUp

Model No: PSPM-BW0-00

Certificate No:

Power Rating: 2400W-10A 240V-

USB Input: 100-240V-50/60Hz 0.7A

USB Port Output: 5V-2.4A

Type C Port Output: 5V-3A

Total Output: 25W MAX

Product Features

USB-A

Fast charge USB socket that provides up to 2.4A at 5V (12W). The USB-A fitting takes the majority of current USB devices.

USB-C

Fast charge USB socket that provides up to 3A at 5V (15W). The USB-C fitting future proofs this unit as well as providing more power to existing devices that support it.

NZ/AUS power sockets

Power sockets for standard mains power accessories in Australia and New Zealand

Pole clamp





Suitable to fit posts from 35mm diameter up to 40mm diameter


Power button with light indicator

Turn off the ChargeUp unit when not in use to reduce idle power usage

1.8m power lead

Sturdy certified power lead

Package contents	
ChargeUp	
Pole clamp	
2 x Cap screws	
4mm Allen key	

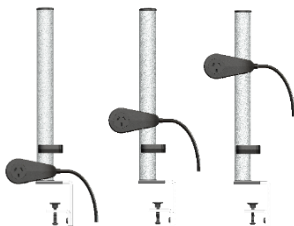


Note: Where assembling to a pole, ChargeUp can be placed at any height

Assembling to a pole

1.



2.

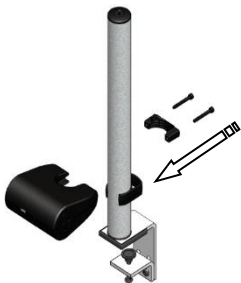

1.8m power lead
plugs into standard
3 pin NZ/AUS
socket

USB-A and USB-C socket
for charging only



Push button
switch to turn
unit on/off

Blue indicator
light shows when
the unit is on

Usage Notes

- The total power of the connected electrical equipment must not exceed the rated power of this product.
- Do not cover the product as it may overheat
- Do not disassemble the unit as there is a risk of electric shock.
- Opening the unit or having it repaired by an unauthorized service centre will void the warranty.

Warranty Policy

'Integ' brand products are designed and built with reliability in mind to ensure that you have many satisfying years of dependable performance.

Modtec provides a 12 month warranty against defects in materials and/or faulty workmanship. The warranty is effective from the date of purchase, to the original purchaser.

This warranty does not cover claims of incidental or consequential damage, loss, injury, or expense due to normal wear and tear, improper use or neglect. This warranty will be considered void if it is found that the product has not been used in accordance with the manufacturers specifications or has been subjected to unauthorized alterations, abuse or damage.

If you experience any problem with an Integ product, please contact Modtec with a description of the difficulty you are experiencing. Customer satisfaction is important to us. Modtec will endeavour to help resolve your difficulty. While any difficulty with our product is very rare, it is important feedback for us and an opportunity for improvement.

Should the Modtec investigation reveal a warranty issue, Modtec agrees to repair, replace or upgrade the product. Should the Modtec investigation reveal the issue is not a warranty issue, Modtec will report its findings and recommendations to the purchaser without charge.



ChargeUp

Modtec Industries Ltd
PO Box 14, Silverdale ,
Auckland 0932
New Zealand

Phone:
(+64) 9 426 6380
Email:
order@integinternational.com

